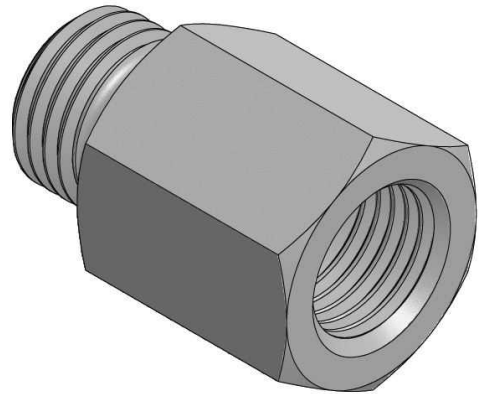
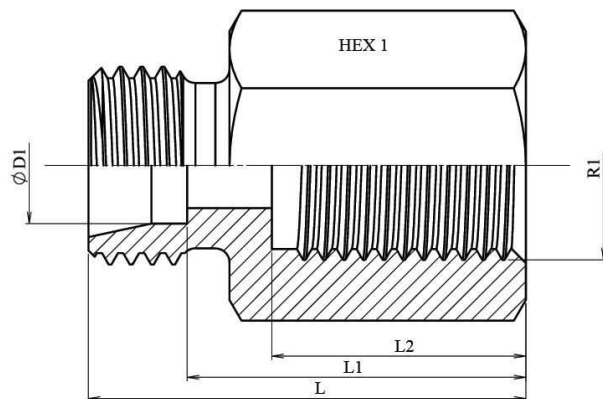


Female stud couplings BSP cyl**1/1**

ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1
6	L	1/8" BSP	315	26	19	12	14
8	L	1/4" BSP	315	31	24	17	19
10	L	1/4" BSP	315	32	25	17	19
10	L	3/8" BSP	315	33	26	17	22
10	L	1/2" BSP	315	37	30	20	27
12	L	3/8" BSP	315	33	26	17	22
12	L	1/2" BSP	315	37	30	20	27
15	L	1/2" BSP	315	38	31	20	27
18	L	1/2" BSP	315	38	30,5	20	27
22	L	3/4" BSP	160	43	35,5	22	32
28	L	1" BSP	160	45,5	38	24,5	41
35	L	1"1/4 BSP	160	51,5	41	26,5	55
42	L	1"1/2 BSP	160	53,5	42,5	28,5	55
6	S	1/4" BSP	400	33	26	17	19
8	S	1/4" BSP	400	33	26	17	19
10	S	3/8" BSP	400	34	26,5	17	24
12	S	3/8" BSP	400	34	26,5	17	24
14	S	1/2" BSP	400	40	32	20	27
16	S	1/2" BSP	400	40	31,5	20	27
20	S	3/4" BSP	315	45	34,5	22	36
25	S	1" BSP	315	49,5	37,5	24,5	41
30	S	1"1/4 BSP	315	55,5	42	26,5	50
38	S	1"1/2 BSP	250	59,5	43,5	28,5	60