


BULKHEAD VERSION

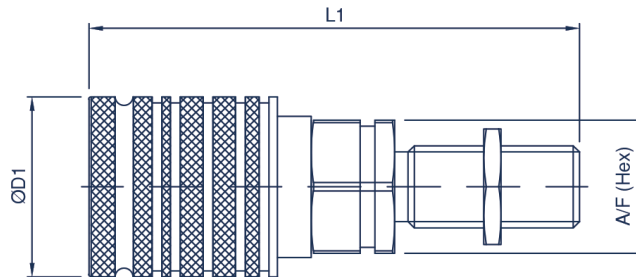

FEMALE COUPLING

Thread Size	D1		L1		A/F	
	mm	inch	mm	inch	mm	inch
3/8 BSPP	38.1	1.50	66.0	2.60	27.0	1.06
9/16-18 UNF	38.1	1.50	66.0	2.60	27.0	1.06
1/2 BSPP	38.1	1.50	66.0	2.60	27.0	1.06
1/2 NPTF	38.1	1.50	66.0	2.60	27.0	1.06
1/2 NPTF	38.1	1.50	66.0	2.60	27.0	1.06
3/4-16 UNF	38.1	1.50	66.0	2.60	27.0	1.06
M18X1.5	38.1	1.50	73.5	2.89	27.0	1.06
M18X1.5	38.1	1.50	73.5	2.89	27.0	1.06
M18X1.5	38.1	1.50	87.0	3.43	27.0	1.06
M18X1.5	38.1	1.50	66.0	2.60	27.0	1.06
M20X1.5	38.1	1.50	73.5	2.89	27.0	1.06
M20X1.5	38.1	1.50	87.0	3.43	27.0	1.06
M22X1.5	38.1	1.50	66.0	2.60	27.0	1.06
M22X1.5	38.1	1.50	89.0	3.50	27.0	1.06
M22X1.5	38.1	1.50	75.5	2.97	27.0	1.06
M22X1.5	38.1	1.50	89.0	3.50	27.0	1.06
M26X1.5	38.1	1.50	89.0	3.50	27.0	1.06
M30X2	38.1	1.50	77.5	3.05	27.0	1.06