


MALE

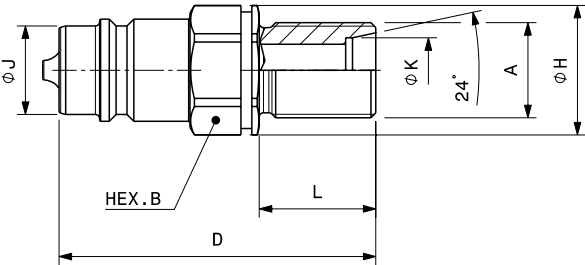

Port description: MALE THREAD METRIC L SCHOTT – BULKHEAD SERIES – 24°CONE (ISO 8434-1 & DIN 2353)

BODY SIZE			ISO DN	BG	PORT (A)	Overall Length		Length		Hex		Overall Diameter		Diameter		Length		Body Diameter		Weight								
						mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lb							
1/4"			6,3	1	M14 X 1,5	G	120,5	4,74	D	60,0	2,36	B	19,0	0,75	H	21,0	0,83	K	8,2	0,32	L	25,0	0,98	J	11,9	0,47	0,06	0,13
3/8"			10	2	M14X 1,5	G	123,2	4,85	D	61,3	2,41	B	22,0	0,87	H	24,0	0,94	K	8,2	0,32	L	25,0	0,98	J	17,3	0,68	0,08	0,18
3/8"			10	2	M16 X 1.5	G	125,2	4,93	D	62,3	2,45	B	22,0	0,87	H	24,0	0,94	K	10,2	0,40	L	26,0	1,02	J	17,3	0,68	0,08	0,18
1/2"			12,5	3	M14 X 1,5	G	133,0	5,24	D	73,3	2,89	B	27,0	1,06	H	30,0	1,18	K	8,2	0,32	L	26,0	1,02	J	20,5	0,81	0,13	0,29
1/2"			12,5	3	M16 X 1.5	G	131,0	5,16	D	72,3	2,85	B	27,0	1,06	H	30,0	1,18	K	10,2	0,40	L	26,0	1,02	J	20,5	0,81	0,13	0,29
1/2"			12,5	3	M18 X 1,5	G	139,0	5,47	D	76,3	3,00	B	27,0	1,06	H	30,0	1,18	K	12,2	0,48	L	30,0	1,18	J	20,5	0,81	0,14	0,31
1/2"			12,5	3	M22x1,5	G	133,0	5,24	D	73,3	2,89	B	27,0	1,06	H	30,0	1,18	K	15,2	0,60	L	27,0	1,06	J	20,5	0,81	0,15	0,34
1/2"			12,5	3	M26x1,5	G	133,0	5,24	D	73,3	2,89	B	27,0	1,06	H	30,0	1,18	K	18,2	0,72	L	27,0	1,06	J	20,5	0,81	0,16	0,36
3/4"			19	4	M22x1,5	G	148,5	5,85	D	74,0	2,91	B	36,0	1,42	H	40,0	1,57	K	15,2	0,60	L	27,0	1,06	J	29,0	1,14	0,25	0,55
3/4"			19	4	M30x2	G	166,5	6,56	D	83,0	3,27	B	36,0	1,42	H	40,0	1,57	K	22,0	0,87	L	36,0	1,42	J	29,0	1,14	0,29	0,64

Locknuts

Port description: MALE THREAD METRIC S SCHOTT – BULKHEAD SERIES – 24°CONE (ISO 8434-1 & DIN 2353)

BODY SIZE			ISO DN	BG	PORT (A)	Overall Length			Length			Hex			Overall Diameter			Diameter			Length			Body Diameter			Weight	
						mm	in		mm	in		mm	in		mm	in		mm	in		mm	in		mm	in		mm	in
1/2"			12,5	3	M18 X 1,5	G	133,0	5,24	D	73,3	2,89	B	27,0	1,06	H	30,0	1,18	K	10,2	0,40	L	27,0	1,06	J	20,5	0,81	0,16	0,35
1/2"			12,5	3	M20x1,5	G	133,0	5,24	D	73,3	2,89	B	27,0	1,06	H	30,0	1,18	K	12,2	0,48	L	27,0	1,06	J	20,5	0,81	0,15	0,33
1/2"			12,5	3	M24x1,5	G	137,0	5,39	D	75,3	2,96	B	27,0	1,06	H	30,0	1,18	K	16,2	0,64	L	29,0	1,14	J	20,5	0,81	0,17	0,37
3/4"			19	4	M24x1,5	G	152,5	6,00	D	76,0	2,99	B	36,0	1,42	H	40,0	1,57	K	16,2	0,64	L	29,0	1,14	J	29,0	1,14	0,27	0,59
3/4"			19	4	M30x2	G	166,5	6,56	D	83,0	3,27	B	36,0	1,42	H	40,0	1,57	K	20,0	0,79	L	36,0	1,42	J	29,0	1,14	0,31	0,69
1"			25	6	M30x2	G	190,6	7,50	D	95,0	3,74	B	41,0	1,61	H	45,0	1,77	K	20,2	0,80	L	38,0	1,50	J	34,3	1,35	0,44	0,96
1"			25	6	M36x2	G	190,6	7,50	D	95,0	3,74	B	41,0	1,61	H	45,0	1,77	K	25,2	0,99	L	38,0	1,50	J	34,3	1,35	0,48	1,06

Locknuts