


1077 SERIES

TNS

C.U.R.P.

Manufactured according to ISO 7241-A & ISO 5675 norms.
Push-pull coupling, connectable under residual pressure in both male and female side

(S) 13 - 1/2"

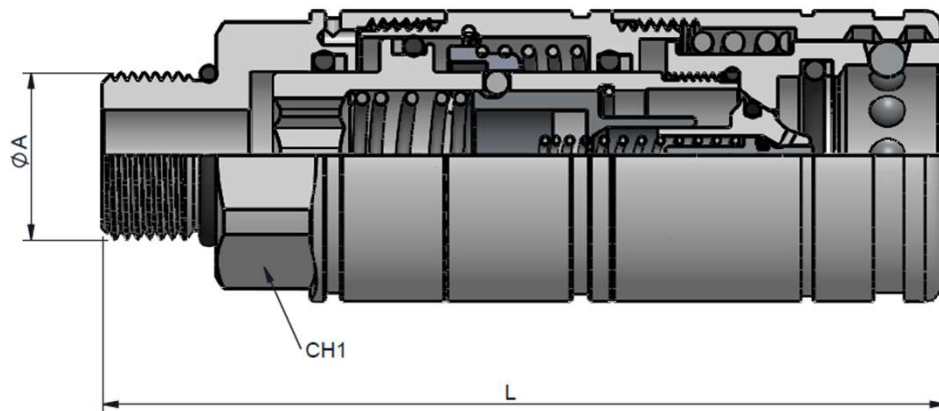

(S)	ØA		THREAD	STANDARD	L	CH	
13	1/2" BSP		FEMALE	BS5200	107	32	250
	1/2" NPTF		FEMALE	ANSI B1.20.3	107		
	3/4"- 16h UNF		FEMALE	SAE J1926-1	107		
	7/8"- 14h UNF		FEMALE	SAE J1926-1	109		
	1/2" BSP		MALE	BS5200	113		
	3/4"- 16h UNF		MALE	SAE J1926-2	108		
	7/8"- 14h UNF		MALE	SAE J1926-2	114		
	1 1/16"-12h UN		MALE	SAE J1926-2	111		
	M18x1.50		MALE	ISO 6149-2	113		
	M22x1.50		MALE	ISO 6149-2	113		
	M22x1.5 15L		MALE	ISO 8434-1 / DIN 2353	118		
	M30x2 22L		MALE	ISO 8434-1 / DIN 2353	118		
	M22x1.5 14S		MALE	ISO 8434-1 / DIN 2353	118		
	M18x1.5 12L		BULKHEAD MALE	ISO 8434-1 / DIN 2353	122		
	M22X1.5 15L		BULKHEAD MALE	ISO 8434-1 / DIN 2353	122		
	M24x1.5 16S		BULKHEAD MALE	ISO 8434-1 / DIN 2353	122		
	3/4"- 16h UNF		MALE	ISO 8434-2	111		
	7/8"- 14h UNF		MALE	ISO 8434-2	115		
	3/4"- 16h UNF		BULKHEAD MALE	ISO 8434-2	125		
	7/8"- 14h UNF		BULKHEAD MALE	ISO 8434-2	129		
	13/16"- 16h UN		MALE	ISO 8434-3	109		
	1"- 14h UNS		BULKHEAD MALE	ISO 8434-3	130		
	1 3/16"- 12h UN		BULKHEAD MALE	ISO 8434-3	137		
	M22x1.50		MALE	ISO 9974-2 / DIN 3852-11	110		