


Quick-release couplings
Trale flat face quick release couplings and brake valves

Ecological flat face coupling BSP ISO 16028

Mild Steel

1/1

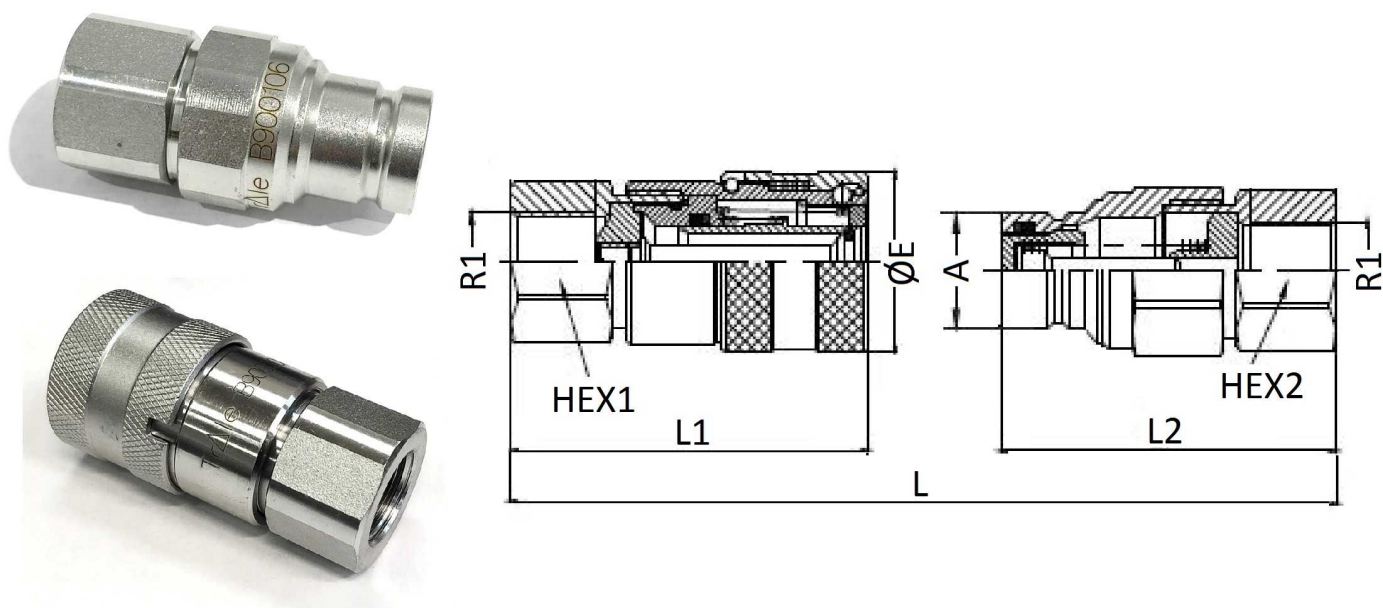

Material: Steel

Seals: NBR

Working temperature: -20°C / +100°C

R1	Working Pressure (bar)	ISO size	BG size	Coupling	Water flow(l/min)	L	L1	L2	HEX 1	HEX 2	ØE	A
1/4" BSP	300	6	1	M	12	96,2		49,2		20		16,1
3/8" BSP	250	10	2	M	23	108,4		55,8		24		19,7
1/2" BSP	250	10	2	M	23					32		19,7
1/2" BSP	250	12	3	M	45	129,3		72		32		24,5
3/4" BSP	250	16	4A	M	75	138		75,5		36		27
1" BSP	250	19	4	M	100	172,1		93,8		41		30
1/4" BSP	300	6	1	F	12	96,2	58,2		20		28	
3/8" BSP	250	10	2	F	23	108,4	68,2		24		32	
1/2" BSP	250	10	2	F	23				32		32	
1/2" BSP	250	12	3	F	45	129,3	75		32		38	
3/4" BSP	250	16	4A	F	75	138	80		36		42	
1" BSP	250	19	4	F	100	172,1	99,8		41		48	

*** Review attached PDF***