


MALE

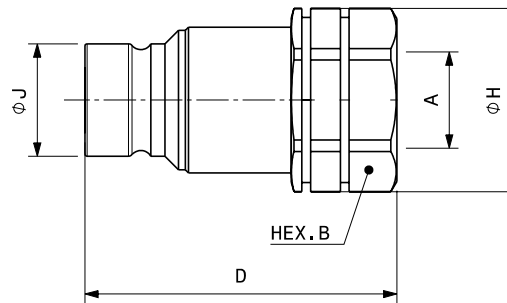

Port description: FEMALE THREAD SAE (ISO 11926-1 & SAEJ1926-1)

BODY SIZE				ISO DM	PORT (A)	Overall Length		Length		Hex		Diameter		Diameter		Weight						
						mm	in	mm	in	mm	in	mm	in	mm	in	kg	lb					
1/8"				-	3/8-24UNF	G	68,4	2,69	D	36,3	1,43	B	17,0	0,67	H	18,5	0,73	J	11,6	0,46	0,04	0,08
1/8"				-	7/16 - 20UNF	G	84,3	3,32	D	40,3	1,59	B	17,0	0,67	H	18,5	0,73	J	11,6	0,46	0,04	0,09
1/4"				6,3	9/16-18UNF	G	96,2	3,79	D	50,9	2,00	B	22,0	0,87	H	23,8	0,94	J	16,1	0,63	0,09	0,20
3/8"				10	9/16-18UNF	G	108,8	4,28	D	60,0	2,36	B	27,0	1,06	H	29,0	1,14	J	19,7	0,78	0,08	0,19
3/8"				10	3/4-16UNF	G	116,3	4,58	D	62,5	2,46	B	27,0	1,06	H	29,0	1,14	J	19,7	0,78	0,15	0,32
3/8"				10	7/8-14UNF	G	121,3	4,78	D	65,5	2,58	B	30,0	1,18	H	32,0	1,26	J	19,7	0,78	0,17	0,36
1/2"				12,5	7/8-14UNF	G	131,5	5,18	D	70,0	2,76	B	36,0	1,42	H	40,0	1,57	J	24,5	0,96	0,29	0,65
1/2"				12,5	1-1/1612UN	G	139,0	5,47	D	72,5	2,85	B	36,0	1,42	H	40,0	1,57	J	24,5	0,96	0,28	0,61
5/8"				16	1-1/16-12UN	G	139,4	5,49	D	73,0	2,87	B	36,0	1,42	H	38,5	1,52	J	27,0	1,06	0,30	0,65
3/4"				19	1-1/16-12UN	G	160,5	6,32	D	83,7	3,30	B	46,0	1,81	H	49,8	1,96	J	30,0	1,18	0,52	1,15
3/4"				19	1-5/16-12UN	G	160,5	6,32	D	83,7	3,30	B	46,0	1,81	H	49,8	1,96	J	30,0	1,18	0,47	1,03
3/4"				19	1-5/8-12UN	G	191,1	7,52	D	87,8	3,46	B	55,0	2,17	H	59,8	2,35	J	30,0	1,18	0,00	0,00
1"				25	1-5/16-12UN	G	178,6	7,03	D	96,8	3,81	B	55,0	2,17	H	59,8	2,35	J	36,0	1,42	0,89	1,96
1"				25	1-5/8-12UN	G	172,8	6,80	D	90,0	3,54	B	55,0	2,17	H	59,8	2,35	J	36,0	1,42	0,71	1,56
				31,5	1-5/16-12UN	G	206,8	8,14	D	105,0	4,13	B	55,0	2,17	H	59,8	2,35	J	44,0	1,73	1,13	2,49
				31,5	1-5/8-12UN	G	206,8	8,14	D	105,0	4,13	B	55,0	2,17	H	59,8	2,35	J	44,0	1,73	1,09	2,39
				38	1-7/8-12UN	G	214,9	8,46	D	111,1	4,37	B	65,0	2,56	H	69,8	2,75	J	57,0	2,24	1,66	3,66