


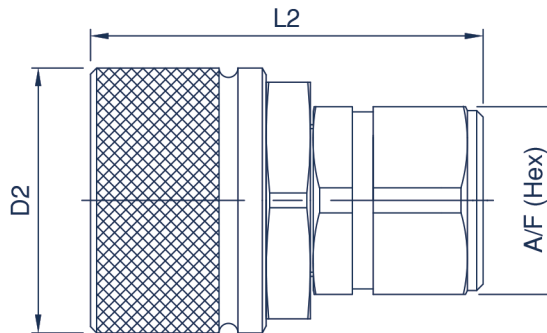

MALE COUPLING

ISO Standard	Body Size
6.3	04 (1/8)
10	08 (5/16)
12.5	10 (3/8)
20	12 (1/2)
N/A	20 (3/4)
N/A	25 (1)

Thread Size	D2		L2		A/F	
	mm	inch	mm	inch	mm	inch
1/4 BSPP	35.0	1.38	59.0	2.32	19.0	0.75
1/4 NPTF	35.0	1.38	59.0	2.32	19.0	0.75
1/4 BSPP	34.0	1.34	61.0	2.40	22.0	0.87
3/8 BSPP	34.0	1.34	61.0	2.40	22.0	0.87
3/8 NPTF	34.0	1.34	61.0	2.40	22.0	0.87
3/8 BSPP	42.1	1.66	64.0	2.52	30.0	1.18
1/2 BSPP	42.1	1.66	64.0	2.52	30.0	1.18
1/2 NPTF	42.1	1.66	64.0	2.52	30.0	1.18
1/2 BSPP	48.5	1.91	75.0	2.95	36.0	1.42
3/4 BSPP	48.5	1.91	75.0	2.95	36.0	1.42
3/4 NPTF	48.5	1.91	75.0	2.95	36.0	1.42
3/4 BSPP	55.0	2.17	81.0	3.19	41.0	1.61
1 BSPP	55.0	2.17	81.0	3.19	41.0	1.61
1 NPTF	55.0	2.17	81.0	3.19	41.0	1.61
1 1/4 BSPP	85.0	3.35	131.0	5.16	55.0	2.17
1 1/2 BSPP	85.0	3.35	134.0	5.28	55.0	2.17

For all other configurations or thread types please contact the sales office.