


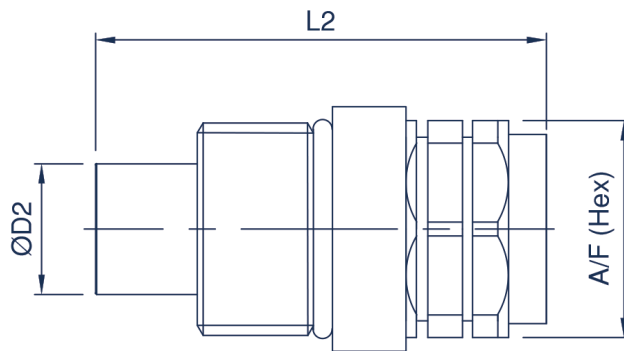

MALE COUPLING

Body Size	Thread Size	D2		L2		A/F	
		mm	inch	mm	inch	mm	inch
10 (3/8)	3/8 BSPP	19.7	0.78	85.0	3.35	27.0	1.06
	3/8 NPTF	19.7	0.78	85.0	3.35	27.0	1.06
	1/2 BSPP	19.7	0.78	85.0	3.35	27.0	1.06
	1/2 NPTF	19.7	0.78	85.0	3.35	27.0	1.06
	3/4-16 UNF	19.7	0.78	85.0	3.35	27.0	1.06
12 (1/2)	1/2 BSPP	24.5	0.97	95.0	3.74	36.0	1.42
	1/2 NPTF	24.5	0.97	95.0	3.74	36.0	1.42
	3/4-16 UNF	24.5	0.97	95.0	3.74	36.0	1.42
	3/4 BSPP	24.5	0.97	95.0	3.74	36.0	1.42
	3/4 NPTF	24.5	0.97	95.0	3.74	36.0	1.42
	1 1/16-12 UN	24.5	0.97	95.0	3.74	36.0	1.42
16 (5/8)	3/4 BSPP	27.0	1.06	99.0	3.90	36.0	1.42
	3/4 NPTF	27.0	1.06	99.0	3.90	36.0	1.42
	1 1/16-12 UN	27.0	1.06	99.0	3.90	36.0	1.42
19 (3/4)	3/4 BSPP	29.9	1.18	114.0	4.49	46.0	1.81
	3/4 NPTF	29.9	1.18	114.0	4.49	46.0	1.81
	1 BSPP	29.9	1.18	114.0	4.49	46.0	1.81
	1 NPTF	29.9	1.18	114.0	4.49	46.0	1.81
	1 5/16-12 UN	29.9	1.18	114.0	4.49	46.0	1.81
	1 1/4 BSPP	36.0	1.42	123.5	4.86	55.0	2.17
25 (1)	1 1/4 NPTF	36.0	1.42	123.5	4.86	55.0	2.17
	1 5/8-12 UN	36.0	1.42	123.5	4.86	55.0	2.17
	1 1/2 BSPP	57.0	2.24	150.0	5.91	65.0	2.56
25 (1)	1 1/2 NPTF	57.0	2.24	150.0	5.91	65.0	2.56
	1 7/8-12 UN	57.0	2.24	150.0	5.91	65.0	2.56