


Cupla rapida tip „L” fil. ext. 250 Bar

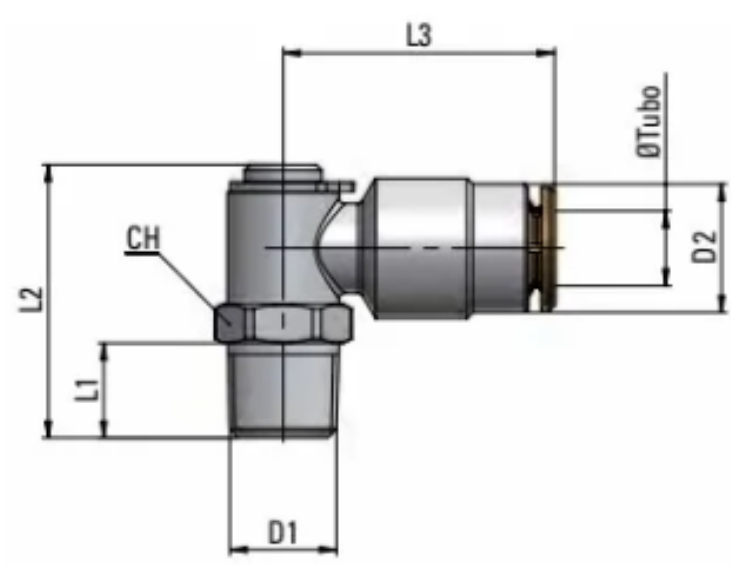

Ø Tubo	D1	D2	L1	L2	L3	CH	g 
4	R1/8	9,5	8,5	24,5	22	11	18,5
4	M6x0,75	9,5	6	22	22	11	16,8
4	M6x1	9,5	8	24	22	11	16,9
4	M8x1	9,5	8	24	22	11	17,4
4	M10x1	9,5	8	25	22	11	18,9
6	R1/8	11,5	8,5	24,5	24	11	20,2
6	R1/4	11,5	11	28	24	14	25,5
6	M6x1	11,5	8	24	24	11	18,6
6	M8x1	11,5	8	24	24	11	19,5
6	M10x1	11,5	8	25	24	11	21