


45° Swept Female JIC 37° Swivel (DKJ 45°)

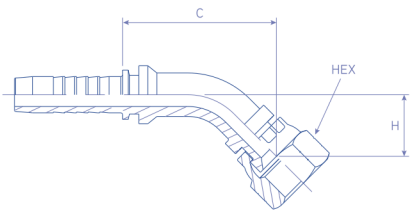

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

hose	hose Ø	thread	C cut off	H	HEX
dash	inch	inch	mm	mm	mm
-3	3/16"	7/16" – 20	25.0	14.5	14
-4	1/4"	7/16" – 20	35.0	14.5	14
-4	1/4"	1/2" – 20	35.0	14.5	16
-4	1/4"	9/16" – 18	35.0	13.0	19
-5	5/16"	1/2" – 20	35.0	14.5	16
-5	5/16"	9/16" – 18	38.5	14.5	19
-6	3/8"	9/16" – 18	38.5	14.5	19
-6	3/8"	3/4" – 16	50.0	15.5	22
-6	3/8"	7/8" – 14	40.5	16.5	27
-8	1/2"	3/4" – 16	44.4	17.5	22
-8	1/2"	7/8" – 14	50.5	21.3	27
-8	1/2"	1.1/16" – 12	59.0	25.0	32
-10	5/8"	7/8" – 14	52.0	25.0	27
-10	5/8"	1.1/16" – 12	64.0	26.5	32
-12	3/4"	1.1/16" – 12	67.5	27.0	32
-12	3/4"	13/16" – 12	68.0	28.0	38
-12	3/4"	1.5/16" – 12	72.0	30.0	38
-16	1"	1.5/16" – 12	83.5	32.0	38
-16	1"	1.5/8" – 12	83.0	36.0	50
-20	1.1/4"	1.5/8" – 12	97.0	37.0	50
-24	1.1/2"	1.7/8" – 12	102.0	38.0	57
-24	1.1/2"	2.1/2" – 12	119.0	49.2	57
-32	2"	2.1/2" – 12	152.0	69.0	75

MATERIAL: Carbon Steel
FINISH: Chromium-(VI) Free plating /
ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
at the end of the REFERENCE)

NOTES: On larger sizes nuts can be
supplied with Trust-Wire Nut (W)