


Female JIC 37° Swivel (DKJ)

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

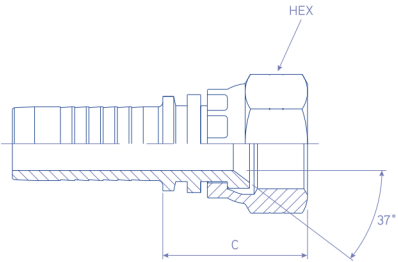

hose	hose Ø	thread	C cut off	HEX
dash	inch	inch	mm	mm
-3	3/16"	7/16" - 20	15.0	14
-4	1/4"	7/16" - 20	14.7	14
-4	1/4"	1/2" - 20	15.2	17
-4	1/4"	9/16" - 18	15.2	19
-5	5/16"	1/2" - 20	15.5	17
-5	5/16"	9/16" - 18	15.5	19
-6	3/8"	9/16" - 18	15.5	19
-6	3/8"	3/4" - 16	17.5	22
-6	3/8"	7/8" - 14	18.5	27
-8	1/2"	9/16" - 18	16.0	19
-8	1/2"	3/4" - 16	18.5	22
-8	1/2"	7/8" - 14	19.0	27
-8	1/2"	1.1/16" - 12	20.5	32
-10	5/8"	3/4" - 16	19.0	22
-10	5/8"	7/8" - 14	19.5	27
-10	5/8"	1.1/16" - 12	21.0	32
-12	3/4"	7/8" - 14	19.7	27
-12	3/4"	1.1/16" - 12	21.2	32
-12	3/4"	1.3/16" - 12	21.2	38
-12	3/4"	1.5/16" - 12	21.7	38
-16	1"	1.1/16" - 12	22.5	32
-16	1"	1.5/16" - 12	22.5	38
-16	1"	1.5/8" - 12	23.5	50
-20	1.1/4"	1.5/8" - 12	25.0	50
-20	1.1/4"	1.7/8" - 12	26.0	57
-24	1.1/2"	1.7/8" - 12	26.0	57
-24	1.1/2"	2.1/2" - 12	30.5	75
-32	2"	2.1/2" - 12	31.5	75

MATERIAL: Carbon Steel
FINISH: Chromium-(VI) Free plating / ROHS compliant

VERSIONS: Stainless Steel (add an 'S' at the end of the REFERENCE)

NOTES: On larger sizes nuts can be supplied with Trust-Wire Nut (W)