


45° Swept Female BSP Parallel Pipe Swivel (DKR 45°)

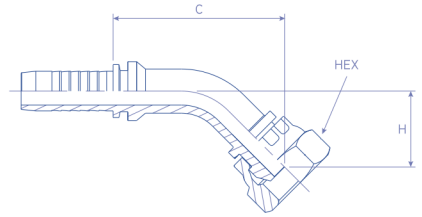

ISO 12151-6 / ISO 8434-6 / BS 5200

hose	hose Ø	thread	C cut off	H	HEX
dash	inch	inch	mm	mm	mm
-3	3/16"	1/8" - 28	30.0	12.5	14
-3	3/16"	1/4" - 19	33.5	13.0	19
-4	1/4"	1/8" - 28	29.0	12.5	14
-4	1/4"	1/4" - 19	33.5	13.0	19
-4	1/4"	3/8" - 19	34.2	14.4	22
-4	1/4"	1/2" - 14	38.0	16.0	27
-5	5/16"	1/4" - 19	33.5	13.0	19
-5	5/16"	3/8" - 19	42.5	19.0	22
-5	5/16"	1/2" - 14	42.5	19.0	27
-6	3/8"	1/4" - 19	33.5	13.0	19
-6	3/8"	3/8" - 19	40.0	14.7	22
-6	3/8"	1/2" - 14	38.6	15.8	27
-8	1/2"	3/8" - 19	34.2	15.0	22
-8	1/2"	1/2" - 14	46.0	18.0	27
-8	1/2"	5/8" - 14	55.0	23.0	27
-8	1/2"	3/4" - 14	56.0	24.0	32
-10	5/8"	1/2" - 14	46.5	18.0	27
-10	5/8"	5/8" - 14	60.5	23.3	27
-10	5/8"	3/4" - 14	64.0	26.9	32
-12	3/4"	3/4" - 14	67.5	24.5	32
-12	3/4"	1" - 11	70.0	26.0	38
-16	1"	1" - 11	83.6	33.8	38
-16	1"	1.1/4" - 11	92.3	41.7	50
-20	1.1/4"	1.1/4" - 11	97.0	37.5	50
-20	1.1/4"	1.1/2" - 11	102.0	42.0	55
-24	1.1/2"	1.1/2" - 11	119.0	49.2	55
-24	1.1/2"	2" - 11	125.0	55.0	70
-32	2"	2" - 11	149.8	60.0	70

MATERIAL: Carbon Steel
FINISH: Chromium-(VI) Free plating /
 ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
 at the end of the REFERENCE)

NOTES: On larger sizes nuts can be
 supplied with Trust-Wire Nut (W)