


Female BSP Parallel Pipe Swivel (DKR)

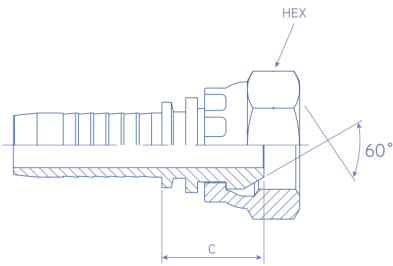

ISO 12151-6 / ISO 8434-6 / BS 5200

hose	hose Ø	thread	C cut off	HEX
dash	inch	inch	mm	mm
-3	3/16"	1/8" - 28	16.0	14
-3	3/16"	1/4" - 19	18.5	19
-4	1/4"	1/8" - 28	15.2	14
-4	1/4"	1/4" - 19	17.7	19
-4	1/4"	3/8" - 19	18.7	22
-4	1/4"	1/2" - 14	20.7	27
-5	5/16"	1/4" - 19	18.0	19
-5	5/16"	3/8" - 19	19.5	22
-5	5/16"	1/2" - 14	21.0	27
-6	3/8"	1/4" - 19	18.0	19
-6	3/8"	3/8" - 19	19.5	22
-6	3/8"	1/2" - 14	21.0	27
-8	1/2"	3/8" - 19	19.5	22
-8	1/2"	1/2" - 14	21.5	27
-8	1/2"	5/8" - 14	22.0	30
-8	1/2"	3/4" - 14	21.0	27
-10	5/8"	1/2" - 14	22.5	27
-10	5/8"	5/8" - 14	23.0	30
-10	5/8"	3/4" - 14	23.5	32
-12	3/4"	3/4" - 14	23.7	32
-12	3/4"	1" - 11	22.7	38
-16	1"	1" - 11	26.5	38
-16	1"	1.1/4" - 11	29.0	50
-20	1.1/4"	1.1/4" - 11	30.5	50
-20	1.1/4"	1.1/2" - 11	30.0	55
-24	1.1/2"	1.1/2" - 11	32.0	55
-24	1.1/2"	2" - 11	34.0	70
-32	2"	2" - 11	34.0	70
-40	2.1/2"	2.1/2" - 11	41.0	90
-48	3"	3" - 11	47.0	100

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
at the end of the REFERENCE)

NOTES: On larger sizes nuts can be
supplied with Trust-Wire Nut (W)