


90° Swept Female BSP Parallel Pipe Swivel (DKR 90°)

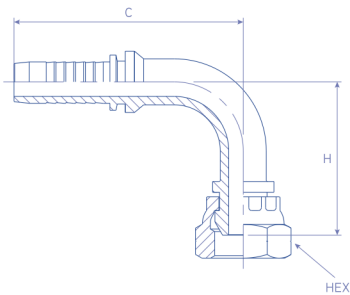

ISO 12151-6 / ISO 8434-6 / BS 5200

hose	hose Ø	thread	C cut off	H	HEX
dash	inch	inch	mm	mm	mm
-3	3/16"	1/8" – 28	25.5	26.0	14
-3	3/16"	1/4" – 19	25.5	26.0	19
-4	1/4"	1/8" – 28	26.7	26.5	14
-4	1/4"	1/4" – 19	27.6	27,5	19
-4	1/4"	3/8" – 19	28.0	29,5	22
-4	1/4"	1/2" – 14	30.0	30.0	27
-5	5/16"	1/4" – 19	32.0	30.0	19
-5	5/16"	3/8" – 19	32.5	30.5	22
-5	5/16"	1/2" – 14	30.0	30.0	27
-6	3/8"	1/4" – 19	28.0	29.5	19
-6	3/8"	3/8" – 19	33.0	31.5	22
-6	3/8"	1/2" – 14	34.0	31.5	27
-8	1/2"	3/8" – 19	35.0	35.0	22
-8	1/2"	1/2" – 14	39.5	38.5	27
-8	1/2"	5/8" – 14	45.0	42.0	27
-8	1/2"	3/4" – 14	54.0	55.0	32
-10	5/8"	1/2" – 14	54.0	48.0	27
-10	5/8"	5/8" – 14	54.0	50.0	27
-10	5/8"	3/4" – 14	54.0	55.0	32
-12	3/4"	3/4" – 14	55.5	55.0	32
-12	3/4"	1" – 11	60.5	64.0	38
-16	1"	1" – 11	71.5	71.0	38
-16	1"	1.1/4" – 11	79.5	79,5	50
-20	1.1/4"	1.1/4" – 11	85.5	77.0	50
-20	1.1/4"	1.1/2" – 11	91.5	92.0	55
-24	1.1/2"	1.1/2" – 11	102.0	100.0	55
-24	1.1/2"	2" – 11	110.0	110.0	70
-32	2"	2" – 11	132.3	128.0	70

MATERIAL: Carbon Steel
FINISH: Chromium-(VI) Free plating /
 ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
 at the end of the REFERENCE)

NOTES: On larger sizes nuts can be
 supplied with Trust-Wire Nut (W)