


45° Swept Female ORFS Swivel

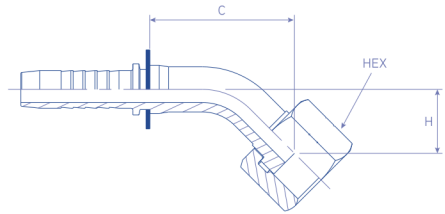

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

hose	hose Ø	thread	C cut off	H	HEX
dash	inch	inch	mm	mm	mm
-4	1/4"	9/16" – 18	32.5	11.0	17
-4	1/4"	11/16" – 16	36.0	13.0	22
-5	5/16"	11/16" – 16	39.0	13.0	22
-6	3/8"	11/16" – 16	36.0	13.4	22
-6	3/8"	13/16" – 16	39.0	15.0	24
-8	1/2"	13/16" – 16	43.0	15.0	24
-8	1/2"	1" – 14	45.0	17.0	30
-8	1/2"	1.3/16" – 14	54.0	21.0	36
-10	5/8"	13/16" – 16	54.0	22.0	24
-10	5/8"	1" – 14	55.0	21.0	30
-10	5/8"	1.3/16" – 14	57.0	23.0	36
-12	3/4"	1" – 14	60.0	23.0	30
-12	3/4"	1.3/16" – 14	62.0	22.0	36
-12	3/4"	1.7/16" – 12	66.0	24.0	41
-16	1"	1.7/16" – 12	76.0	27.0	41
-16	1"	1.11/16" – 12	76.0	27.0	50
-20	1.1/4"	1.11/16" – 12	95.0	34.0	50
-24	1.1/2"	2" – 12	120.0	45.0	60

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
at the end of the REFERENCE)