




– 2-Way Ball Valve BSP or NPT Female

Directional Scheme:

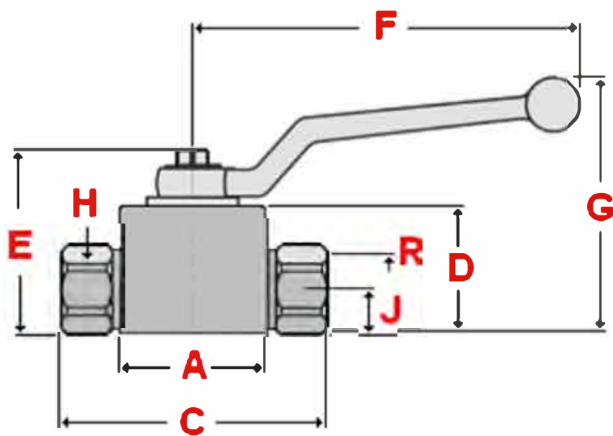

Function : 2-way ball valve for shut off of hydraulic lines

Materials : carbon steel body, zinc plated; zamak handle, plated

Threads : female BSP or NPT

Maximum operating temperature : + 98°C / + 208°F (other materials for higher temperatures as special features)

Minimum operating temperature : - 0°C / + 32°F (other materials for lower temperatures as special features)

Application : high pressure hydraulic lines, agricultural equipment, mining industry, paint industry

nominal size	working pressure		dimensions (mm)								
			R	A	C	D	E	F	G	H	J
1/4"	500	7250	1/4"	40	72	35	47	110	64	22	13
3/8"	500	7250	3/8"	45	75	40	52	110	69	27	16
1/2"	500	7250	1/2"	50	85	45	56	110	76	30	18
3/4"	250	3600	3/4"	60	93	58	75	150	96	41	23
1"	250	3600	1"	65	114	65	86	150	104	46	28