


Balfit® ORFS x SAE-ORB Straight Male Connector

36.220.

ISO 8434-3 / SAE J1453 / ISO 11926-2 / SAE J1926-2

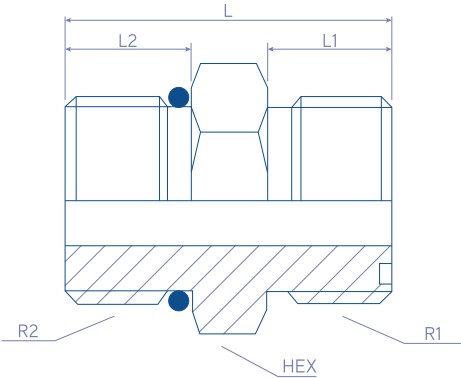

REFERENCE	tube		thread		dimensions			
	mm	inch	R1	R2	L	L1	L2	HEX
36.220.0404	6	1/4"	9/16" – 18	7/16" – 20	28.7	10.9	10	17
36.220.0406	6	1/4"	9/16" – 18	9/16" – 18	30.5	12	10	17
36.220.0606	10	3/8"	11/16" – 16	9/16" – 18	31.9	12	11	19
36.220.0608	10	3/8"	11/16" – 16	3/4" – 16	35	14	11	22
36.220.0808	12	1/2"	13/16" – 16	3/4" – 16	36.6	14	13	22
36.220.0810	12	1/2"	13/16" – 16	7/8" – 14	40.4	16	13	27
36.220.1008	14	5/8"	1" – 14	3/4" – 16	45	14	15.5	27
36.220.1010	15	5/8"	1" – 14	7/8" – 14	43	16	15.5	27
36.220.1012	16	5/8"	1" – 14	1.1/16" – 12	47	18.5	15.5	32
36.220.1210	20	3/4"	1.3/16" – 12	7/8" – 14	48.5	16	17	32
36.220.1212	20	3/4"	1.3/16" – 12	1.1/16" – 12	48.5	18.4	17	32
36.220.1216	20	3/4"	1.3/16" – 12	1.5/16" – 12	50	18.5	17	38
36.220.1612	25	1"	1.7/16" – 12	1.1/16" – 12	50.5	18.6	17.5	41
36.220.1616	25	1"	1.7/16" – 12	1.5/16" – 12	50.5	18.7	17.5	41
36.220.2020	32	1.1/4"	1.11/16" – 12	1.5/8" – 12	52	18.5	17.5	46
36.220.2424	38	1.1/2"	2" – 12	1.7/8" – 12	54	18.5	17.5	55

MATERIAL: Carbon Steel

FINISH: Zinc-plated

VERSIONS: BALFIT® STAINLESS STEEL
STRAIGHT MALE CONNECTOR ORFS X
SAE-ORB (add an 'S' at the end of the
part number; ex: 36.220.0808S)