
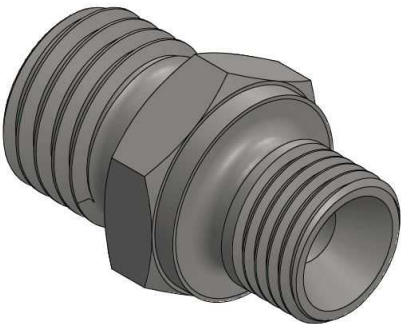


DIN 2353 Pipe fittings without nut and ring

Male stud couplings

Straight male stud coupling BSP cyl. 60°

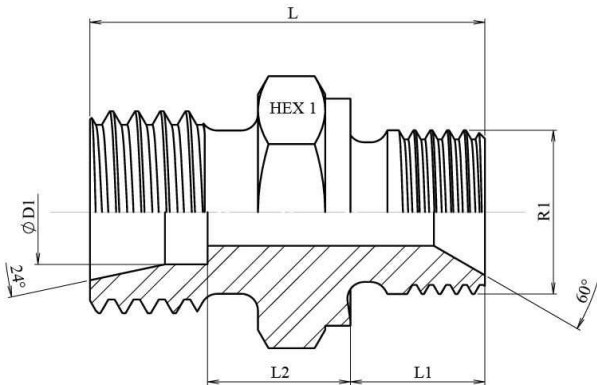

ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1
6	L	1/8" BSP	315	23,5	8	8,5	14
6	L	1/4" BSP	315	28	11	10	19
6	L	1/2" BSP	315	32,5	14	18,5	27
6	L	3/8" BSP	315	30	12	18	22
8	L	1/8" BSP	315	24,5	8	9,5	14
8	L	1/4" BSP	315	29	11	11	19
8	L	3/8" BSP	315	30	12	11	22
8	L	1/2" BSP	315	32,5	14	18,5	27
10	L	1/8" BSP	315	25,5	8	17,5	17
10	L	1/4" BSP	315	30	11	12	19
10	L	3/8" BSP	315	31	12	12	22
10	L	1/2" BSP	315	33,5	14	12,5	27
12	L	1/4" BSP	315	31	11	13	19
12	L	3/8" BSP	315	32	12	13	22
12	L	1/2" BSP	315	34,5	14	13,5	27
12	L	3/4" BSP	315	37,5	16	21,5	32
15	L	3/8" BSP	315	33	12	14	22
15	L	1/2" BSP	315	33	12	14	27
15	L	3/4" BSP	315	38,5	16	22,5	32
18	L	3/8" BSP	160	33	12	21	22
18	L	1/2" BSP	160	36,5	14	15	27
18	L	3/4" BSP	160	38,5	16	15	32
22	L	1/2" BSP	160	38,5	14	17,5	32
22	L	3/4" BSP	160	40,5	16	17	32
22	L	1" BSP	160	44,5	19	25,5	41
28	L	3/4" BSP	160	41,5	16	18	41

Straight male stud coupling BSP cyl. 60°**2/2**

ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1
35	L	1" BSP	160	46,5	19	17	46
35	L	1" 1/4 BSP	160	48	20	17,5	50
42	L	1" 1/2 BSP	160	52	22	19	55
6	S	1/4" BSP	630	32	11	14	19
8	S	1/4" BSP	630	34	11	16	19
8	S	3/8" BSP	630	35	12	23	22
10	S	1/4" BSP	630	34	11	16,5	19
10	S	3/8" BSP	630	35	12	15,5	22
10	S	1/2" BSP	630	39,5	14	25,5	27
12	S	1/4" BSP	630	34	11	23	22
12	S	3/8" BSP	630	37	12	17,5	22
12	S	1/2" BSP	630	39,5	14	18	27
14	S	3/8" BSP	630	39	12	19	24
14	S	1/2" BSP	630	41,5	14	19,5	27
16	S	3/8" BSP	400	39	12	18,5	27
16	S	1/2" BSP	400	41,5	14	19	27
16	S	3/4" BSP	400	43,5	16	19	32
20	S	1/2" BSP	400	45,5	14	21	32
20	S	3/4" BSP	400	47,5	16	21	32
25	S	3/4" BSP	400	50,5	16	34,5	41
25	S	1" BSP	400	53,5	19	34	41
30	S	1" BSP	400	55,5	19	36,5	46
30	S	1" 1/4 BSP	400	57	20	37	50
38	S	1" 1/4 BSP	315	62	20	42	55
38	S	1" 1/2 BSP	315	64	22	42	55