



DIN 2353 Pipe fittings

Straight male stud couplings

Straight male stud coupling BSP cyl. 60°

Stainless Steel AISI 316-L

1/2

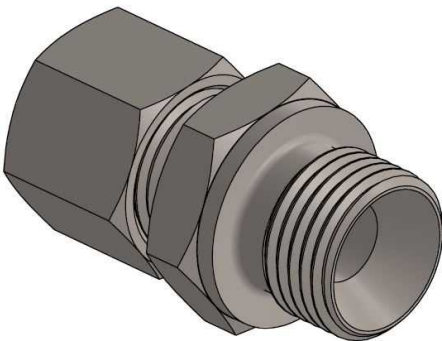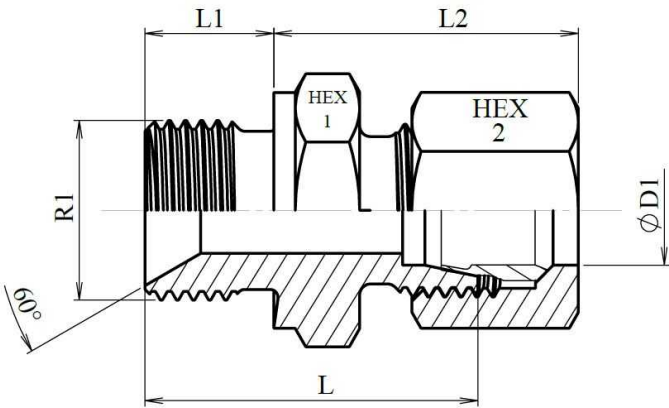

ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1	HEX 2
6	L	1/8" BSP	315	23,5	8	23,5	14	14
6	L	1/4" BSP	315	29	12	25	19	14
6	L	3/8" BSP	315	30,5	12	26,5	22	14
6	L	1/2" BSP	315	33	14	23,5	27	14
8	L	1/8" BSP	315	24,5	8	24	14	17
8	L	1/4" BSP	315	29	12	25	19	17
8	L	3/8" BSP	315	30,5	12	26,5	22	17
8	L	1/2" BSP	315	33	14	26,5	27	17
10	L	1/8" BSP	315	25,5	8	25,5	17	19
10	L	1/4" BSP	315	30	12	26	19	19
10	L	3/8" BSP	315	31,5	12	27,5	22	19
10	L	1/2" BSP	315	34	14	28	27	19
12	L	1/4" BSP	315	31	12	27	19	22
12	L	3/8" BSP	315	31,5	12	27,5	22	22
12	L	1/2" BSP	315	35	15	20	27	22
15	L	3/8" BSP	315	32,5	12	29	24	27
15	L	1/2" BSP	315	35	14	29	27	27
15	L	3/4" BSP	315	38	16	30	32	27
18	L	1/2" BSP	315	36	14	31	27	32
18	L	3/4" BSP	315	38	16	31	32	32
18	L	3/8" BSP	160	38	12	34	41	41
22	L	3/8" BSP	160	35,5	12	32,5	32	36
22	L	1/2" BSP	160	38	14	33	32	36
22	L	3/4" BSP	160	40	16	33	32	36
22	L	1" BSP	160	43	18	34	41	36
28	L	3/4" BSP	160	41	16	34	41	41

Straight male stud coupling BSP cyl. 60°

Stainless Steel AISI 316-L

2/2

ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1	HEX 2
35	L	1"1/4 BSP	160	48	20	39	50	50
42	L	1"1/2 BSP	160	52	22	42	55	60
6	S	1/4" BSP	630	32	12	28	19	17
6	S	3/8" BSP	630	35	12	31	22	17
8	S	1/4" BSP	630	34	12	30	19	19
8	S	3/8" BSP	630	34,5	12	30,5	22	19
8	S	1/2" BSP	630	36	14	30	27	19
10	S	1/4" BSP	630	34	12	31	19	22
10	S	3/8" BSP	630	34,5	12	31	22	22
10	S	1/2" BSP	630	39	14	34	27	22
12	S	1/4" BSP	630	36	12	33	22	24
12	S	3/8" BSP	630	36,5	12	33,5	22	24
12	S	1/2" BSP	630	39	14	34	27	24
14	S	3/8" BSP	630	38,5	12	36,5	24	27
14	S	1/2" BSP	630	41	14	37	27	27
16	S	3/8" BSP	400	38,5	12	36,5	27	30
16	S	1/2" BSP	400	41	14	37	27	30
16	S	3/4" BSP	400	45	16	39	32	30
20	S	1/2" BSP	400	45	14	42	32	36
20	S	3/4" BSP	400	47	16	42	32	36
20	S	1" BSP	400	51	18	44	41	36
25	S	3/4" BSP	400	51	16	47	41	46
25	S	1" BSP	400	53	18	47	41	46
30	S	1" BSP	400	55	18	50	46	50
30	S	1"1/4 BSP	400	57	20	50	50	50
30	S	1"1/2 BSP	400	64	22	55	55	55
38	S	1"1/4 BSP	315	62	20	57	55	60