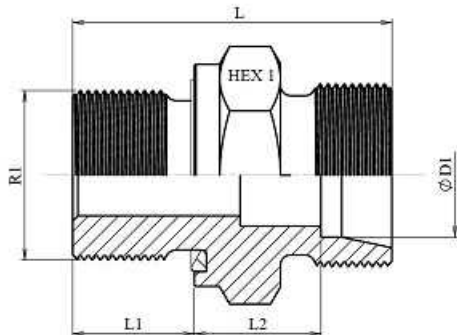


**Straight male stud coupling with captive seal BSP
cyl****1/2**

ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1
6	L	1/8" BSP	500	23,5	8	8,5	14
6	L	1/4" BSP	500	28	12	9	19
6	L	3/8 BSP	500	31,5	12	12,5	22
8	L	1/8" BSP	500	24,5	8	9,5	14
8	L	1/4" BSP	500	29	12	10	19
8	L	3/8 BSP	400	29,5	12	10,5	22
8	L	1/2" BSP	400	34	14	13	27
10	L	1/8" BSP	500	25,5	8	10,5	17
10	L	1/4 BSP	500	30	12	11	19
10	L	3/8 BSP	400	30,5	12	11,5	22
10	L	1/2 BSP	400	33	14	12	27
12	L	1/4 BSP	400	31	12	12	19
12	L	3/8 BSP	400	31,5	12	12,5	22
12	L	1/2 BSP	400	34	14	13	27
12	L	3/4" BSP	400	40,5	16	16,5	41
15	L	3/8 BSP	400	32,5	12	13,5	24
15	L	1/2 BSP	315	35	14	14	27
15	L	3/4 BSP	250	37	16	14	32
18	L	3/8" BSP	400	33,5	12	11,5	27
18	L	1/2 BSP	400	36	14	14,5	27
18	L	3/4 BSP	250	38	16	14,5	32
22	L	1/2 BSP	250	38	14	16,5	32
22	L	3/4 BSP	250	40	16	16,5	32
22	L	1	250	42	18	16,5	41
28	L	3/4 BSP	250	41	16	17,5	41
28	L	1" BSP	250	43	18	17,5	41

**Straight male stud coupling with captive seal BSP
cyl****2/2**

ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1
35	L	1" BSP	250	45,5	18	17,5	46
35	L	1 1/4 BSP	250	48	20	17,5	50
42	L	1 1/2 BSP	250	52	22	19	55
6	S	1/4 BSP	630	32	12	13	19
8	S	1/4 BSP	630	34	12	15	19
8	S	3/8 BSP	630	34,5	12	15,5	22
10	S	1/4 BSP	630	34	12	14,5	19
10	S	3/8 BSP	630	34,5	12	15	22
10	S	1/2 BSP	630	37	14	15,5	27
12	S	1/4 BSP	630	36	12	16,5	22
12	S	3/8 BSP	630	36,5	12	17	22
12	S	1/2 BSP	630	39	14	17,5	27
14	S	3/8" BSP	630	38,5	12	12,5	24
14	S	1/2 BSP	630	41	14	19	27
16	S	3/8 BSP	420	38,5	12	18	27
16	S	1/2 BSP	420	41	14	18,5	27
16	S	3/4 BSP	420	43	16	18,5	32
20	S	1/2" BSP	420	45	14	12	32
20	S	3/4 BSP	420	47	16	20,5	32
25	S	3/4 BSP	420	51	16	23	41
25	S	1"BSP	420	53	18	23	41
30	S	1" BSP	420	55	18	23,5	46
30	S	1 1/4 BSP	420	57	20	23,5	50
38	S	1" 1/4 BSP	315	62	20	26	55
38	S	1 1/2 BSP	315	64	22	24	55