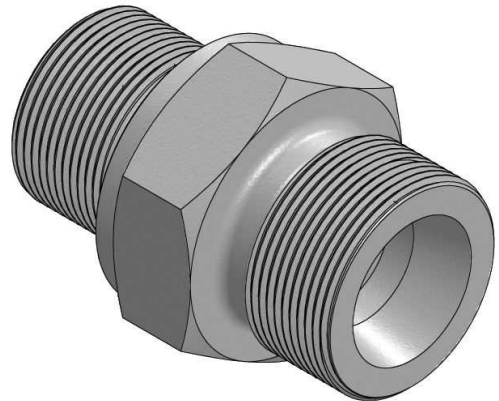
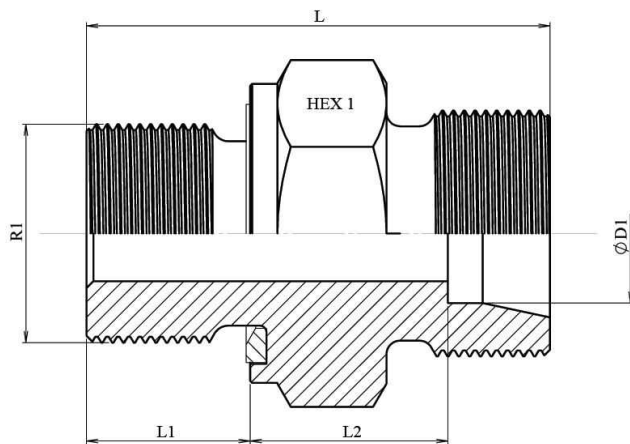


Straight male stud couplings Metrical cyl with captive seal**1/2**

ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1
6	L	M10x1	500	23,5	8	8,5	14
8	L	M12x1,5	500	29	12	10	17
10	L	M14x1,5	500	30	12	11	19
10	L	M16x1,5	400	31,5	12	12,5	22
10	L	M18x1,5	400	31,5	12	12,5	24
10	L	M22x1,5	315	35	14	14	27
12	L	M14X1,5	315	31	12	12	22
12	L	M16x1,5	400	31,5	12	12,5	22
12	L	M18x1,5	400	31,5	12	12,5	24
12	L	M22x1,5	400	35	14	14	27
15	L	M18x1,5	400	32,5	12	13,5	24
15	L	M22x1,5	400	36	14	15	27
18	L	M18x1,5	315	34,5	12	15	27
18	L	M22x1,5	400	36	14	14,5	27
22	L	M26x1,5	250	40	16	16,5	32
28	L	M33x2	250	43	18	17,5	41
35	L	M42x2	250	48	20	17,5	50
42	L	M48x2	250	52	22	19	55
6	S	M12x1,5	630	32	12	13	17
8	S	M14X1.5	630	34	12	15	19
10	S	M16x1,5	630	34,5	12	15	22
12	S	M18x1,5	630	36,5	12	17	24
14	S	M20x1,5	630	41	14	19	27
16	S	M22x1,5	420	41	14	18,5	27
20	S	M27x2	420	47	16	20,5	32
25	S	M33x2	420	53	18	23	41

Straight male stud couplings Metrical cyl with captive seal

ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1
38	S	M48x2	315	64	22	26	55