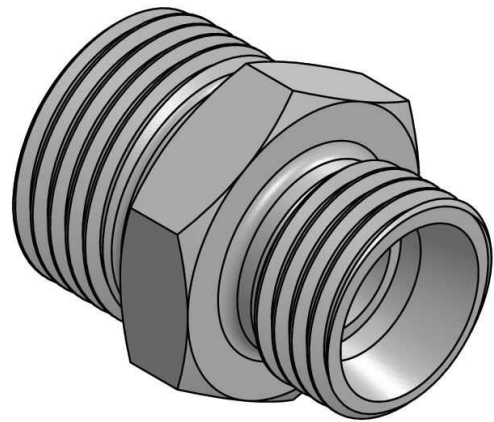
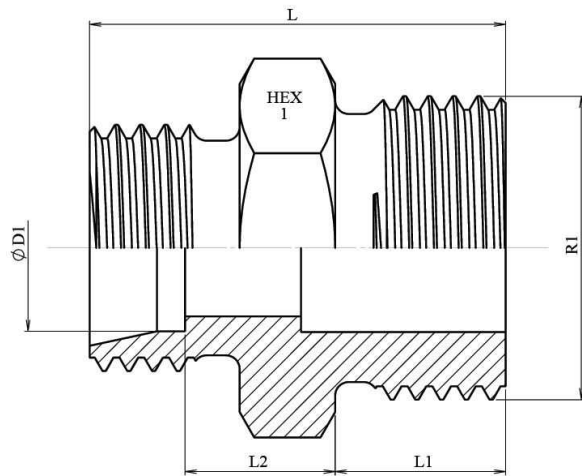


Straight male stud coupling UNF**1/2**

ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1
8	L	7/16 UNF	315	27	9	11	17
10	L	7/16 UNF	315	28	9	12	17
12	L	3/4 UNF	315	31,5	11	13,5	24
12	L	7/8 UNF	315	34	12,7	14,3	27
12	L	9/16 UNF	315	29	10	12	19
15	L	3/4 UNF	315	32,5	11	14,5	24
18	L	3/4 UNF	315	33	11	15	27
18	L	7/8 UNF	315	35	12,7	14,8	27
22	L	1 1/16 UNF	160	39,5	15	17	32
22	L	1 5/16 UNF	160	41	15	18	41
22	L	7/8 UNF	160	37	12,7	16,8	32
28	L	1 1/16 UNF	160	40	15	17,5	41
28	L	1 5/16 UNF	160	41	15	18	41
35	L	1 5/16 UNF	160	44	15	18	46
35	L	1 5/8 UNF	160	44	15	18	50
42	L	1 5/8 UNF	160	46	15	19,5	55
8	S	7/16 UNF	630	31	11	13	17
10	S	9/16 UNF	630	32	12	12,5	19
12	S	3/4 UNF	630	36	14	14,5	24
12	S	9/16 UNF	630	32,5	12	13	22
16	S	3/4 UNF	400	38	14	15,5	24
20	S	1 1/16 UNF	400	46	18,5	17	32
20	S	3/4 UNF	400	42	14	17,5	32
20	S	7/8 UNF	400	44	16	17,5	32
25	S	1 5/16 UNF	400	50	18,5	19,5	41
30	S	1 5/16 UNF	400	52	18,5	20	46

DIN 2353 Pipe fittings without nut and ring

Male stud couplings

Straight male stud coupling UNF

ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1
-----	-------	----	------------------------	---	----	----	-------

They can be delivered with gasket.