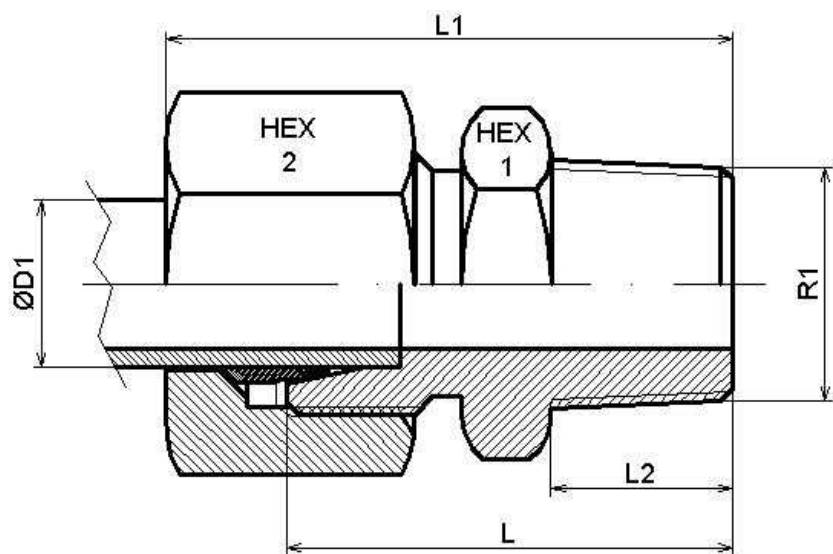


Straight male stud coupling BSPT tapered

Mild Steel

1/1

ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1	HEX 2
4	LL	1/8" BSPT	100	20	26	8	11	10
6	LL	1/8" BSPT	100	20	26	8	11	12
8	LL	1/8" BSPT	100	22	28	8	12	14
8	LL	1/4" BSPT	100	27	33	13	14	14
6	L	1/8" BSPT	315	24	32	10	12	14
6	L	1/4" BSPT	315	28	36	13	17	14
8	L	1/4" BSPT	315	28	36	13	17	17
10	L	1/4" BSPT	315	29	37	13	17	19
10	L	3/8" BSPT	315	30	38	13	19	19
12	L	1/4" BSPT	315	30	38	13	19	22
12	L	3/8" BSPT	315	30	38	13	19	22
12	L	1/2" BSPT	315	34	41	16	24	22
15	L	3/8" BSPT	315	31	39	13	24	27
15	L	1/2" BSPT	315	34	42	16	24	27
18	L	1/2" BSPT	315	35	44	16	27	32
22	L	3/4" BSPT	160	39	48	18	32	36
6	S	1/4" BSPT	400	33	41	13	17	17
8	S	1/4" BSPT	400	33	41	13	17	19
10	S	3/8" BSPT	400	33	42	13	19	22
12	S	3/8" BSPT	400	35	44	13	22	24
16	S	1/2" BSPT	400	40	50	16	27	30
20	S	3/4" BSPT	400	46	57	18	32	36