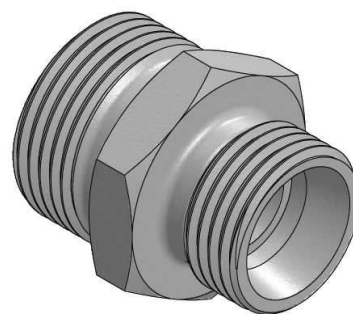
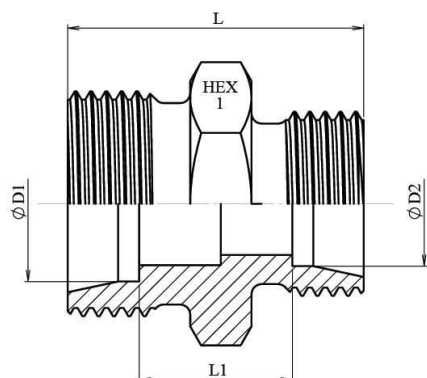


Straight reducing couplings**1/2**

ØD1	ØD2	Serie	Working Pressure (bar)	L	L1	HEX 1
10	6	L	500	26	12	17
10	8	L	500	26	12	17
12	10	L	400	28	14	19
12	8	L	400	27	13	19
15	10	L	400	29	15	24
15	12	L	400	29	15	24
18	12	L	400	30	15,5	27
18	15	L	400	31	16,5	27
22	15	L	250	33	18,5	32
22	18	L	250	33	18	32
28	18	L	250	34	19	41
28	22	L	250	36	21	41
35	22	L	250	39	21	46
35	28	L	250	39	21	46
8	6	S	630	32	18	17
8	6	L	500	25	11	14
10	6	S	630	32	17,5	19
10	8	S	630	32	17,5	19
12	10	S	630	34	19	22
12	6	S	630	34	19,5	22
12	8	S	630	34	19,5	22
14	10	S	630	36	20,5	24
14	12	S	630	36	20,5	24
16	12	S	420	36	20	27
16	14	S	420	38	21,5	27
20	12	S	420	40	22	32

DIN 2353 Pipe fittings without nut and ring
Double couplings

Straight reducing couplings

ØD1	ØD2	Serie	Working Pressure (bar)	L	L1	HEX 1
25	16	S	420	46	25,5	41
25	20	S	420	48	25,5	41
30	20	S	420	50	26	46
30	25	S	420	52	26,5	46
38	30	S	315	59	29,5	55