



Swivel fittings AISI 316 TrAle

Swivel fittings TrAle

Elbow 90° swivel female TrAle

Stainless Steel AISI 316-L

1/1

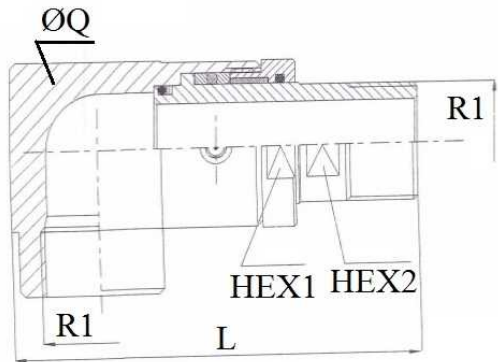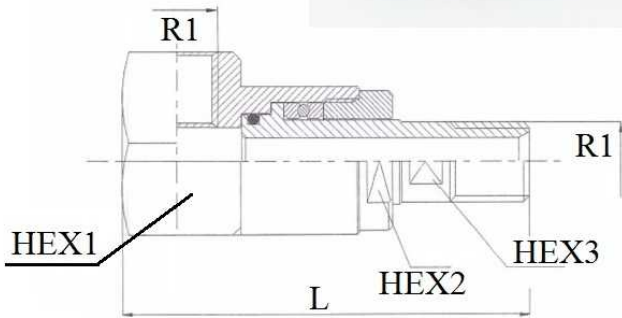

Temperature: -15°C to +250°C

O-rings FKM

Rotation speed: 5-10 rpm

R1	FLOW MAX (l/min)	L	HEX 1	HEX 2	HEX 3	ØQ	Max. static press (bar)
1/4" BSP	24	78	32	21	11		300
3/8 " BSP	45	98	36	27	14		300
1/2" BSP	90	106	46	32	18		300
3/4 " BSP	210	118	50	41	24		250
1" BSP	280	142	60	46	30		250
1" 1/4 BSP	379	155	55	38		60	180
1" 1/2 BSP	860	170	70	41		75	150
2 " BSP	1.400	190	80	55		95	150

Warning: The swivel joints in line and 90 ° are NOT eligible for fast and continuous rotation, but only for angular displacement