


Metric Bonded Seal Sel-Centering

Carbon steel

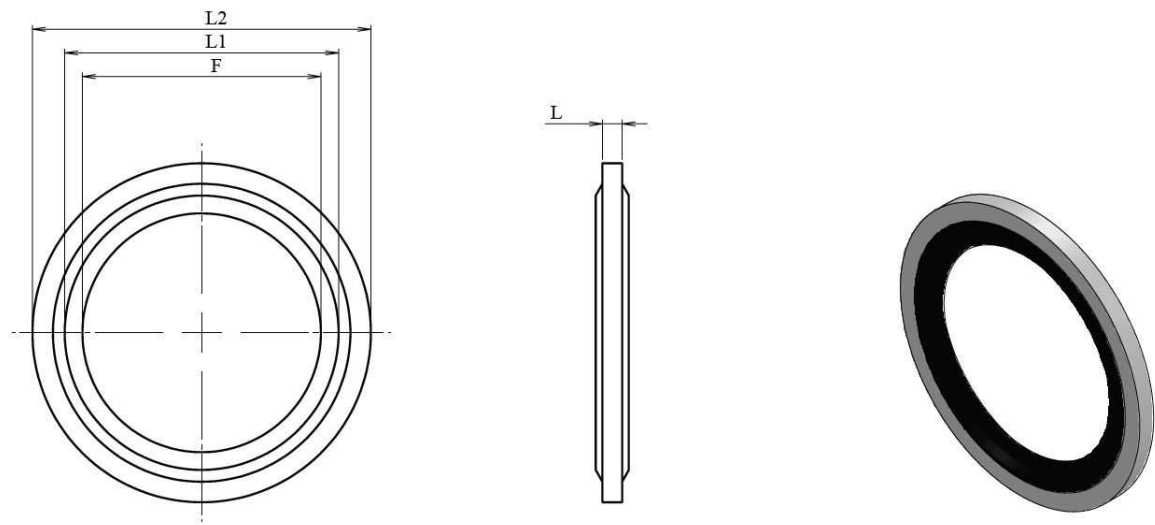

**Materials** Metal: carbon steel AISI 1008 -1010  
Seal: NBR 85 +/- 5 Sh A  
Surface treatment: zinc plate (Cr3)

**Working temperature** From -30°C to +100°C

| R1      | Max Working Pressure (bar) | u/ Bag | L   | L1   | L2 | F     |
|---------|----------------------------|--------|-----|------|----|-------|
| M6X1    | 650                        | 100    | 1   | 6,7  | 10 | 4.70  |
| M8x1    | 750                        | 100    | 1   | 8,7  | 13 | 6.40  |
| M10x1   | 810                        | 100    | 1,5 | 10,7 | 16 | 8.05  |
| M12x1.5 | 750                        | 100    | 1,5 | 12,7 | 18 | 9.73  |
| M14x1.5 | 900                        | 100    | 1,5 | 14,7 | 22 | 11.38 |
| M16x1.5 | 840                        | 100    | 1,5 | 16,7 | 24 | 13.41 |
| M18x1.5 | 760                        | 100    | 1,5 | 18,7 | 26 | 14.76 |
| M20x1.5 | 690                        | 100    | 1,5 | 20,7 | 28 | 16.76 |
| M22x1.5 | 660                        | 100    | 2   | 22,7 | 30 | 18.74 |
| M24x1.5 | 630                        | 100    | 2   | 24,7 | 32 | 20.11 |
| M26x1.5 | 630                        | 100    | 2   | 26,7 | 35 | 22.30 |
| M27X1,5 | 650                        | 100    | 2   | 27,2 | 36 | 23.30 |
| M30x2   | 500                        | 50     | 2   | 31   | 39 | 25.70 |
| M36x2   | 500                        | 25     | 2   | 36,7 | 46 | 31.10 |
| M42x2   | 500                        | 25     | 3   | 42,7 | 53 | 36.50 |
| M48X2   | 480                        | 25     | 3   | 48,7 | 59 | 41.90 |