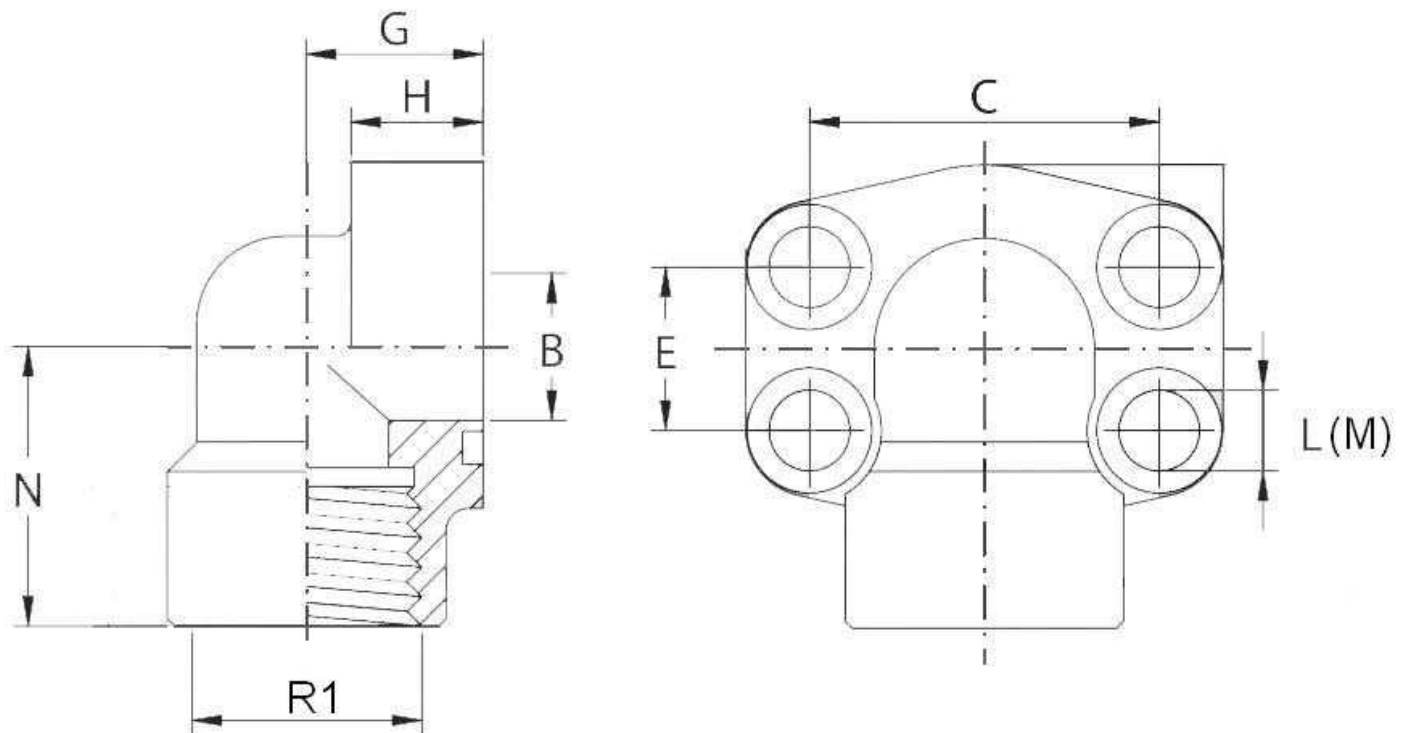


90° BSP female threaded flange

Mild Steel

1/1

Serie	R1	Size	Screw	O'Ring	OR 1	PU Joint	ØB	ØL	C	E	G	H	M	N
3000 PSI	1/2" BSP	1/2"	TB8X30	4075	18.64X3.53	JBR08	13	9	38,1	17,48	20	16	M8x30	37
3000 PSI	3/8" BSP	1/2"	TB8X30	4075	18.64X3.53	JBR08	13	9	38,1	17,48	20	16	M8x30	37
3000 PSI	3/4" BSP	3/4"	TB10X35	4100	24.99X3.53	JBR12	19	11	47,63	22,23	24	18	M10x35	38
3000 PSI	1" BSP	1"	TB10X35	4131	32.92X3.53	JBR16	25	11	52,37	26,19	28	19	M10x35	43
3000 PSI	1"1/4 BSP	1"1/4	TB10X40	4150	37.70X3.53	JBR20	32	11,5	58,72	30,18	34	21	M10x40	51
3000 PSI	1"1/2 BSP	1"1/2	TB12X45	4187	47.22X3.53	JBR24	38	13,5	69,85	35,71	38	25	M12x45	56
3000 PSI	2" BSP	2"	TB12X45	4225	56.74X3.53	JBR32	51	13,5	77,77	42,88	42	25	M12x45	65
6000 PSI	1/2" BSP	1/2"	TB8X30	4075	18.64X3.53	JBR08	13	9	40,49	18,24	20	16	M8x30	37
6000 PSI	3/8" BSP	1/2"	TB8X30	4075	18.64X3.53	JBR08	13	9	40,49	18,24	20	16	M8x30	37
6000 PSI	3/4" BSP	3/4"	TB10X40	4100	24.99X3.53	JBR12	19	11	50,8	23,80	28	19	M10x35	43
6000 PSI	1" BSP	1"	TB12X45	4131	32.92X3.53	JBR16	25	13	57,15	27,76	34	21	M12x45	51
6000 PSI	1"1/4 BSP	1"1/4	TB14X45	4150	37.70X3.53	JBR20	32	15 *	66,68	31,75	38	25	M14x45	56
6000 PSI	1"1/2 BSP	1"1/2	TB16X50	4187	47.22X3.53	JBR24	38	17	79,38	36,50	42	25	M16x50	65

***** Review attached PDF*****

The screws and joints are sold separately.