


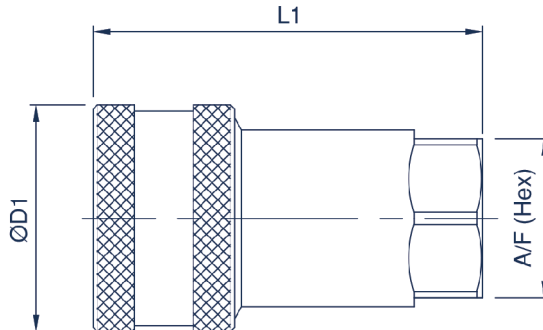

FEMALE COUPLING

Body Size	Thread Size	D1		L1		A/F	
		mm	inch	mm	inch	mm	inch
06 (1/4)	1/4 BSPP	26.0	1.02	50.0	1.79	19.0	0.75
	1/4 NPTF	26.0	1.02	50.0	1.79	19.0	0.75
	7/16-20 UNF	26.0	1.02	50.0	1.79	19.0	0.75
10 (3/8)	3/8 BSPP	31.5	1.24	56.0	2.21	22.0	0.87
	3/8 NPTF	31.5	1.24	56.0	2.21	22.0	0.87
	9/16-18 UNF	31.5	1.24	56.0	2.21	22.0	0.87
12 (1/2)	1/2 BSPP	38.6	1.52	66.3	2.61	27.0	1.06
	1/2 NPTF	38.6	1.52	66.3	2.61	27.0	1.06
	3/4-16 UNF	38.6	1.52	66.3	2.61	27.0	1.06
	7/8-14 UNF	38.6	1.52	66.3	2.61	27.0	1.06
	3/4 NPTF	38.6	1.52	66.3	2.61	32.0	1.26
19 (3/4)	3/4 BSPP	48.0	1.89	80.2	3.16	34.0	1.34
	3/4 NPTF	48.0	1.89	80.2	3.16	34.0	1.34
	1 1/16-12 UN	48.0	1.89	80.2	3.16	34.0	1.34
25 (1)	1 BSPP	56.0	2.20	94.2	3.71	41.0	1.61
	1 NPTF	56.0	2.20	94.2	3.71	41.0	1.61
	1 5/16-12 UN	56.0	2.20	94.2	3.71	41.0	1.61
32 (1 1/4)	1 1/4 BSPP	69.4	2.73	117.1	4.61	50.0	1.97
	1 1/4 NPTF	69.4	2.73	117.1	4.61	50.0	1.97
40 (1 1/2)	1 1/2 BSPP	84.0	3.31	133.0	5.24	60.0	2.36
	1 1/2 NPTF	84.0	3.31	133.0	5.24	60.0	2.36
50 (2)	2 BSPP	99.0	3.90	165.0	6.50	75.0	2.95
	2 NPTF	99.0	3.90	165.0	6.50	75.0	2.95