


STRAIGHT - 60° CONE - ISO 8434-6 (BS 5200)
Metric parallel thread

Type: **AGM**

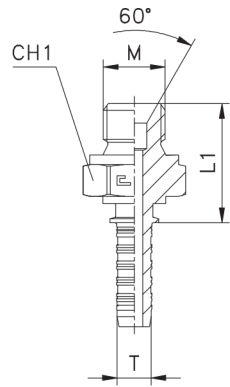

I.D. hose T			M	L1	CH1	PN [bar]
DN	size	INCH				
5	-3	3/16	12x1,5	24,5	17	400
6	-4	1/4	12x1,5	24,5	17	400
6	-4	1/4	14x1,5	24,5	19	400
6	-4	1/4	16x1,5	26,5	22	400
6	-4	1/4	18x1,5	27	24	400
8	-5	5/16	14x1,5	25	19	350
8	-5	5/16	16x1,5	27	22	350
8	-5	5/16	18x1,5	27,5	24	350
10	-6	3/8	14x1,5	25	19	400
10	-6	3/8	16x1,5	27	22	400
10	-6	3/8	18x1,5	27,5	24	400
10	-6	3/8	20x1,5	31	27	350
10	-6	3/8	22x1,5	31	27	350
12	-8	1/2	18x1,5	27,5	24	400
12	-8	1/2	20x1,5	31	27	350
12	-8	1/2	22x1,5	31	27	350
12	-8	1/2	26x1,5	34	32	315
16	-10	5/8	26x1,5	34,5	32	315
19	-12	3/4	26x1,5	35	32	315
19	-12	3/4	30x1,5	37	36	250
25	-16	1	38x1,5	37,5	46	200
31	-20	1 1/4	45x1,5	41,5	55	160