


Male BSP Parallel Pipe (AGR)

ISO 12151-6 / ISO 8434-6 / BS 5200

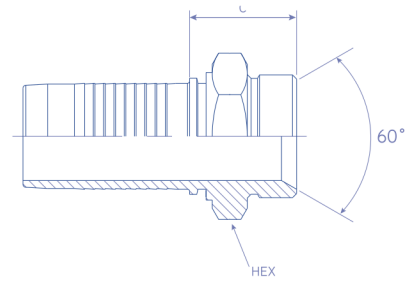

hose	hose Ø	thread	C cut off	HEX
dash	inch	inch	mm	mm
-3	3/16"	1/8" - 28	23.0	14
-3	3/16"	1/4" - 19	27.0	19
-4	1/4"	1/8" - 28	22.2	14
-4	1/4"	1/4" - 19	26.2	19
-4	1/4"	3/8" - 19	28.7	22
-4	1/4"	1/2" - 14	33.2	27
-5	5/16"	1/4" - 19	26.5	19
-5	5/16"	3/8" - 19	29.0	22
-5	5/16"	1/2" - 14	33.5	27
-6	3/8"	1/4" - 19	26.5	19
-6	3/8"	3/8" - 19	29.0	22
-6	3/8"	1/2" - 14	33.5	27
-8	1/2"	3/8" - 19	29.5	22
-8	1/2"	1/2" - 14	33.5	27
-8	1/2"	5/8" - 14	36.5	30
-8	1/2"	3/4" - 14	39.5	32
-10	5/8"	1/2" - 14	34.5	27
-10	5/8"	5/8" - 14	36.0	30
-10	5/8"	3/4" - 14	39.5	32
-12	3/4"	3/4" - 14	39.2	32
-12	3/4"	1" - 11	44.2	41
-16	1"	1" - 11	45.0	41
-16	1"	1 1/4" - 11	48.0	50
-20	1 1/4"	1 1/4" - 11	49.5	50
-20	1 1/4"	1 1/2" - 11	52.0	55
-24	1 1/2"	1 1/2" - 11	52.0	55
-24	1 1/2"	2" - 11	57.5	70
-32	2"	2" - 11	57.5	70

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
at the end of the REFERENCE)