


90° Swept Female JIC 37° Swivel (DKJ 90°)

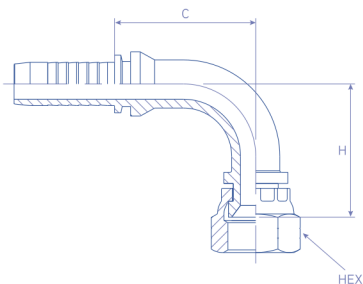

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

hose	hose Ø	thread	C cut off	H	HEX
dash	inch	inch	mm	mm	mm
-3	3/16"	7/16" - 20	27.2	29.0	14
-4	1/4"	7/16" - 20	30.0	31.0	14
-4	1/4"	1/2" - 20	30.8	30.0	16
-4	1/4"	9/16" - 18	28.2	28.0	19
-5	5/16"	1/2" - 20	32.0	33.0	17
-5	5/16"	9/16" - 18	27.0	23.5	19
-6	3/8"	9/16" - 18	34.0	30.0	19
-6	3/8"	3/4" - 16	35.0	30.0	22
-6	3/8"	7/8" - 14	37.1	38.0	27
-8	1/2"	3/4" - 16	39.5	38.0	22
-8	1/2"	7/8" - 14	36.8	40.5	27
-8	1/2"	1.1/16" - 12	46.5	51.0	32
-10	5/8"	7/8" - 14	54.0	52.0	27
-10	5/8"	1.1/16" - 12	54.0	55.0	32
-12	3/4"	7/8" - 14	54.2	55.0	27
-12	3/4"	1.1/16" - 12	55.5	55.0	32
-12	3/4"	1.3/16" - 12	55.5	57.0	38
-12	3/4"	1.5/16" - 12	55.5	60.0	38
-16	1"	1.5/16" - 12	71.5	71.0	38
-16	1"	1.5/8" - 12	79.5	79.5	50
-20	1.1/4"	1.5/8" - 12	85.5	77.0	50
-20	1.1/4"	1.7/8" - 12	86.5	90.0	57
-24	1.1/2"	1.7/8" - 12	102.0	100.0	57
-24	1.1/2"	2.1/2" - 12	118.0	120.0	75
-32	2"	2.1/2" - 12	130.5	140.0	75

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
at the end of the REFERENCE)

NOTES: On larger sizes nuts can be
supplied with Trust-Wire Nut (W)