


90° ELBOW CRIMPED-BACK NUT - 60°CONE - ISO 8434-6 (BS 5200)

Metric parallel thread

Type: DKM90

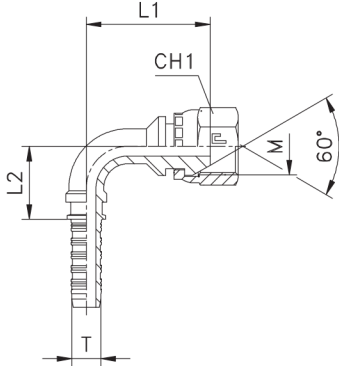

| I.D. hose T |      |      | M      | L1   | L2   | CH1 | PN<br>[bar] |
|-------------|------|------|--------|------|------|-----|-------------|
| DN          | size | INCH |        |      |      |     |             |
| 5           | -3   | 3/16 | 12x1,5 | 26,5 | 21   | 17  | 350         |
| 6           | -4   | 1/4  | 12x1,5 | 26,5 | 21   | 17  | 350         |
| 6           | -4   | 1/4  | 14x1,5 | 26,5 | 21   | 19  | 350         |
| 6           | -4   | 1/4  | 16x1,5 | 30,5 | 21   | 22  | 350         |
| 6           | -4   | 1/4  | 18x1,5 | 30,5 | 21   | 22  | 350         |
| 8           | -5   | 5/16 | 14x1,5 | 32   | 25,5 | 19  | 350         |
| 8           | -5   | 5/16 | 16x1,5 | 35   | 25,5 | 22  | 350         |
| 8           | -5   | 5/16 | 18x1,5 | 35   | 25,5 | 22  | 350         |
| 10          | -6   | 3/8  | 14x1,5 | 34,5 | 29   | 19  | 350         |
| 10          | -6   | 3/8  | 16x1,5 | 36,5 | 29   | 22  | 350         |
| 10          | -6   | 3/8  | 18x1,5 | 36,5 | 29   | 22  | 350         |
| 10          | -6   | 3/8  | 20x1,5 | 39,5 | 29   | 27  | 315         |
| 10          | -6   | 3/8  | 22x1,5 | 39,5 | 29   | 27  | 315         |
| 12          | -8   | 1/2  | 18x1,5 | 40,5 | 35,5 | 22  | 315         |
| 12          | -8   | 1/2  | 20x1,5 | 41,5 | 35,5 | 27  | 315         |
| 12          | -8   | 1/2  | 22x1,5 | 41,5 | 35,5 | 27  | 315         |
| 12          | -8   | 1/2  | 26x1,5 | 47,5 | 35,5 | 32  | 250         |
| 16          | -10  | 5/8  | 26x1,5 | 49   | 39,5 | 32  | 250         |
| 19          | -12  | 3/4  | 26x1,5 | 52,5 | 49,5 | 32  | 250         |