


90° Swept Female ORFS Swivel

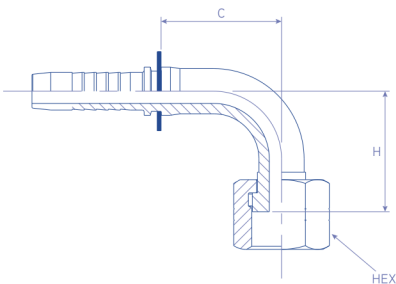

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

hose	hose Ø	thread	C cut off	H	HEX
dash	inch	inch	mm	mm	mm
-4	1/4"	9/16" - 18	26.0	21.0	17
-4	1/4"	11/16" - 16	27.0	25.0	22
-5	5/16"	11/16" - 16	33.0	27.5	22
-6	3/8"	11/16" - 16	34.5	29.0	22
-6	3/8"	13/16" - 16	35.5	30.0	24
-8	1/2"	13/16" - 16	40.0	35.0	24
-8	1/2"	1" - 14	40.5	36.5	30
-8	1/2"	1.3/16" - 14	42.0	43.0	36
-10	5/8"	13/16" - 16	42.0	46.0	24
-10	5/8"	1" - 14	54.0	50.0	30
-10	5/8"	1.3/16" - 14	53.0	48.0	36
-12	3/4"	1" - 14	55.0	50.0	30
-12	3/4"	1.3/16" - 14	57.0	49.0	36
-12	3/4"	1.7/16" - 12	57.0	52.0	41
-16	1"	1.7/16" - 12	68.0	59.0	41
-16	1"	1.11/16" - 12	68.0	77.0	50
-20	1.1/4"	1.11/16" - 12	85.0	77.0	50
-24	1.1/2"	2" - 12	98.0	94.0	60

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
at the end of the REFERENCE)